




NATURAL


TECHNICAL DATA SHEET

SPECIFICATION DETAILS


Product	Engineered Timber Flooring
Timber species	European Oak
Grade	Premium
Profile	Tongue & Groove End-Matched
Finish	Oxidative Lacquer
Shorts	Yes
Waste allowance	Boards: Minimum 10% Herringbone: 15% - 20% Chevron: 15% - 20%
Installation	Direct Stick Glue and Secret Nail Floating (Boards Only)
Warranty	Seven (7) Year Structural Warranty



Board
190mm x 2200mm x 15mm
190mm x 2200mm x 20mm
250mm x 2500mm x 20mm
300mm x 3000mm x 20mm



Herringbone
140mm x 700mm x 20mm




Chevron
140mm x 700mm x 20mm

Stair nosing	1300mm 2200mm
Oak layer	4mm (15mm thick board) 6mm (20mm thick board)

CERTIFICATIONS

Wet Pendulum Test	Contact us
Dry Floor Friction Test	Contact us
Fire Test - Flooring	Contact us
BCA Group Number	Contact us
Emission Test	Contact us

COLOUR RANGE

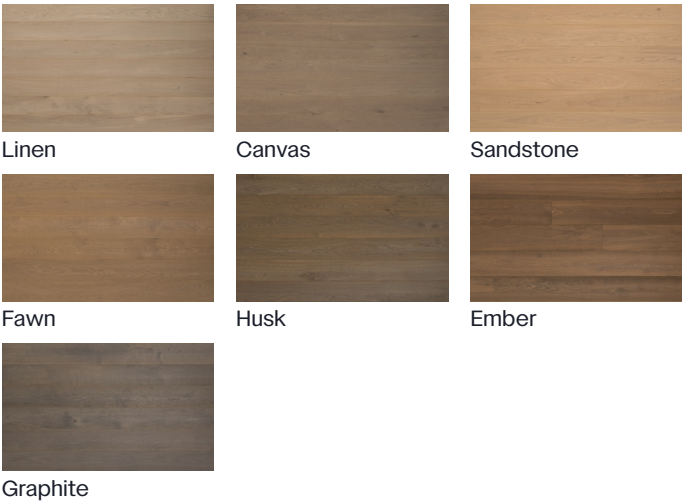

SUSTAINABLY SOURCED



All timber components are sourced from FSC®-certified forests, managed in line with rigorous standards that support sustainable forestry, protect biodiversity, and respect the rights of Indigenous Peoples, workers, and local communities.