





Welcome to Royal Oak Floors

We specialise in premium engineered European Oak flooring designed to endure.

With over 40 years of experience in high-end architectural products, we are the preferred choice of leading architects and designers.

Our products are meticulously constructed, with each piece expertly manufactured. We take pride in our commitment to sustainable practices, diligently selecting all our raw materials from PEFC sources to ensure responsible forestry practices. Furthermore, our floorboards can be re-sanded and re-finished over time, guaranteeing their durability and longevity.

We are dedicated to providing quality timber products inspired by both the Australian and International design communities that continue to drive innovation in the timber flooring industry.

Discover the difference of Royal Oak Floors and experience the elegance and durability of our premium engineered European Oak flooring.

The Architect Collection

An elegant foundation for everyday living, our Architect collection offers a range of timber floors selected for a timeless aesthetic. Explore a diverse palette of tones and textures, from soft light shades to bold dark flooring, backed up by best-in-class engineering.

Species:	European Oak
Grade:	Mixed
Coating:	UV Cured Lacquer
	UV Oil (French Grey only)
Finish:	Matte
Profile:	Tongue & Groove





Herringbone 190 x 1900 x 15/20mm 90 x 450 x 15mm 260 x 2200 x 15/20mm 148 x 888 x 15mm Chevron

4-6mm Oak top layer

Boards



90 x 520 x 15mm



White Smoked.

Natural Suede.



Tanned Oak.



We supply matching stair nosings for all colours. Ask us for details.





Smoked.

Smoked & Black.

OUR **COMMITMENT TO SUSTAINABILITY**

All our timber products are harvested from PEFC or FSC certified sources



Danish White.



Toasted Oak.

Saddle Oak.





French Grey.







Light Oak.




Smoked & Limed.





Dark Oak.

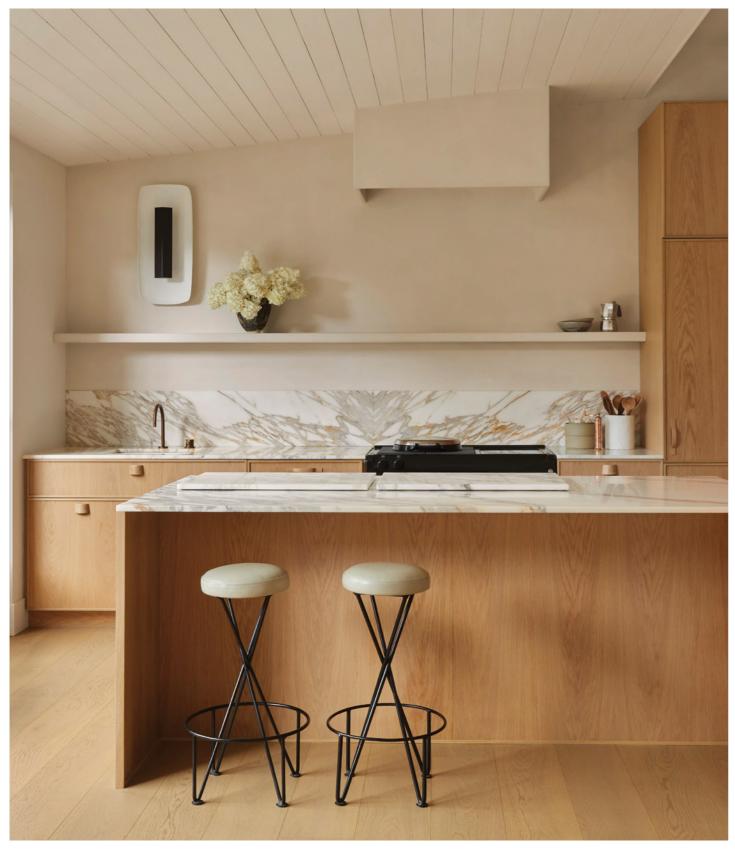

European Oak in Toasted Oak Premium Grade



European Oak in Danish White



European Oak in Mink Grey



European Oak in White Smoked



The Artisan Collection

Dynamic and distinguished, our Artisan Collection showcases the unique colours, textures and types of timber to elevate interior spaces. Featuring European Oak in a wide range of colours, tones and textural styles, the collection caters to a refined design sensibility.

The unique aesthetic of each flooring in this collection is elevated by the treatment of the natural timber, which is carefully hand worked by artisans to bring out the features and natural characteristics.

Species:	European Oak
Grade:	Feature / Rustic / Mixed
Coating:	UV Cured Lacquer (L)
	UV Oil (O)
Finish:	Hand-scraped
Profile:	Tongue & Groove





Boards 180 x 1860 x 15mm 189 x 1830 x 18mm 190 x 1900 x 15/20mm 260 x 2200 x 15/20mm Chevron

90 x 520 x 15mm

4-6mm Oak top layer. Not all colours available in all sizes.







Arctic Grey (L).

Ash Grey (L).





Antique Ale Brown (O).



European Oak in Wheat Fields



Herringbone 90 x 450 x 15mm 148 x 888 x 15mm



Wheat Fields (O).



Peppercorn Grey (L).




Antique Stout Brown (O).



Intrinsic Black (L).



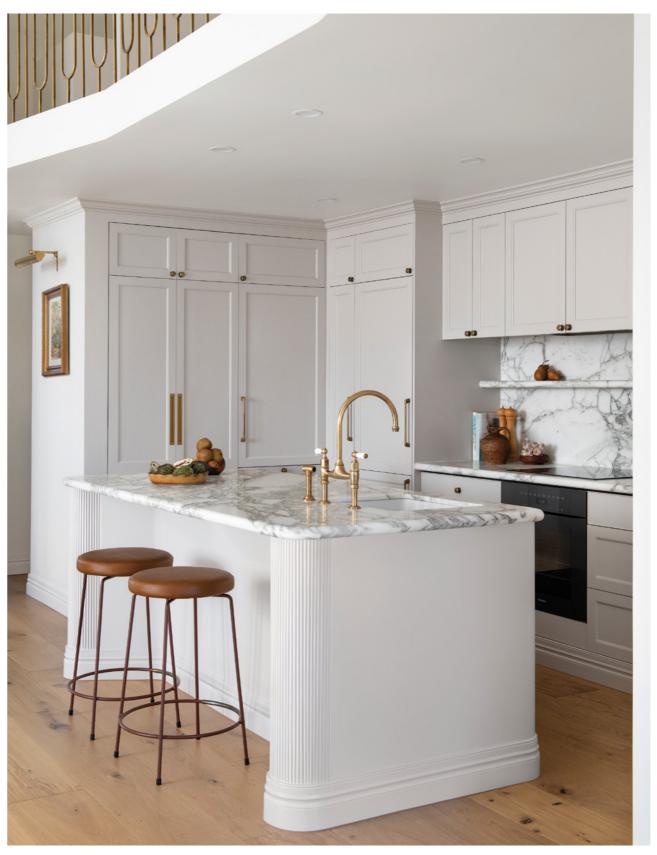

European Oak in Arctic Grey

European Oak in Aged Smoked

Stair Nosings

Solid Oak Stair Nosings

Stair nosings are made from solid oak and are prefinished in our standard colours. They are available for both 15mm and 20mm floorboards in 1300mm and 1800mm lengths.







Engineered Stair Nosings

We can manufacture engineered stair nosings to your own dimensions. Please contact us to discuss your requirements.



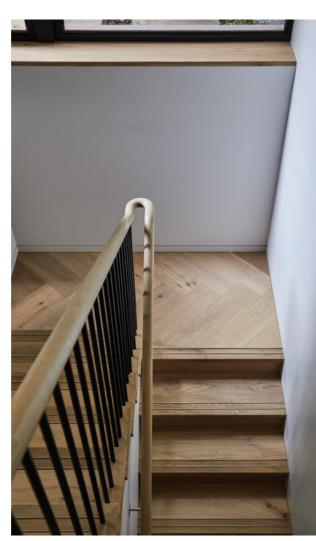

Board Profiles



20mm Multi-ply construction. 6mm Oak Layer with 14mm base.

Grading Specifications



MIXED GRADE Mixed Grade is our standard range. The character and feature of timber is subtly evident throughout the boards, providing a natural and genuine aesthetic.

FEATURE GRADE Feature grade typically exhibits

Feature grade typically exhibits frequent and larger knots, cracks, sapwood and variation. These boards provide character and charm to any space.

Finishes

UV Cured Lacquer

Finished with our 7-coat water-based lacquer system that protects the timber surface whilst enabling the natural beauty of the wood grain.

Applications

Floors

Walls







15mm

3 layer construction.

4mm Oak Layer with 11mm base.



RUSTIC GRADE

Rustic grade is a full featured floor with inherent character. Using distressed Oak, the boards are hand-worked, hand-scraped, hand-pegged and wire brushed to draw out the texture and tonal variations.



PREMIUM GRADE

Premium grade is considered a cleaner look with minimal knots & variation. It is the highest grade of flooring we provide. Note this is not a standard stock item.

UV Oil

Our UV oil finish is absorbed by the timber and penetrates the surface of the wood, retaining the textured appearance.

Ceilings



Joinery





What is an engineered floor?

Engineered timber flooring blends the timeless allure of timber flooring with modern innovation. Composed of multiple layers of wood, it features a solid timber veneer atop sturdy layers that resist environmental shifts, offering greater stability. Its construction allows for diverse installation methods, making it adaptable to different spaces. Resistant to moisture and temperature changes, it's a durable, versatile, and visually appealing option.

Sustainability

Royal Oak Floors' European Oak flooring is a sustainable and eco-friendly choice for your project.

Sustainability is inherent in our product, in using only 4-6mm of European Oak, the yield from each tree is extremely high with a smaller environmental impact. All of our raw materials are harvested from PEFC or FSC certified sources, meaning the supply chain is closely managed to promote sustainable forestry practices.

Our flooring can be re-sanded and re-finished over time, providing flexibility to design trends and longevity to your project.

All our products are low in volatile organic compound (VOC) and formaldehyde, providing a safe product for your home.

European Oak in White Smoked

Installation

Royal Oak Floors can be laid in the following manner:

Concrete sub-floors

- Directly stuck and weighted to a level slab. This method should also be used if sub-floor heating is below.
- Glued and secret nailed on to 9mm or thicker pinned ply.
- Glued and weighted on to glued acoustic mats.

Timber joist sub-floors

• Glued and secret nailed on to structural ply laid over joists.

Walls

• Glued and secret nailed or just secret nailed on to ply-lined walls. Use matched pre-finished solid corner moulding for corners.


Care & Maintenance

Timber is a natural product and requires care and nourishment to preserve its beauty.

We supply the full range of premium WOCA maintenance products to clean and protect your floors and ensure their longevity.



VIEW OUR FULL INSTALLATION AND CLEANING GUIDES

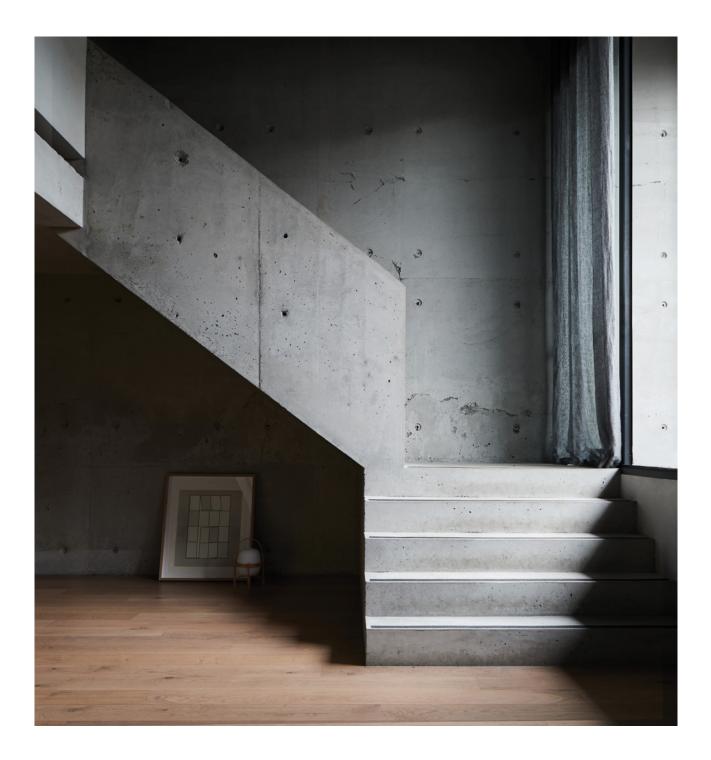

MELBOURNE 9 Almeida Crescent South Yarra VIC 3141

SYDNEY Shop 2, 249 Devonshire Street Surry Hills NSW 2010 flooring@royaloakfloors.com.au 1300 392 214 www.royaloakfloors.com.au